







**SPECIFICATIONS**

Connections	6" x 4" (150 mm x 100 mm) ANSI Flanges
Max Pump Speed	2,200 rpm
Max Flow	2,100 gpm (477 m <sup>3</sup> /h)
Max Head	412' (126 m)
Max Static Priming Lift	28' (8.5 m)
Temperature Limit	160° F (70° C)
Solids Handling Capability	0.875" (22.2 mm)
Max Casing Pressure	200 psig (1379 kPa)
Fuel Cell	128 gallons (572 liters)
Dry Weight	6,000 lbs

**PUMP MATERIAL**

Casing	Cast Steel (CD4MCu is an option)
Impeller	CD4MCu
Bearing Housing	Cast Iron
Bearing Lubrication	Grease
Shaft	Stainless Steel
Seal	Silicon Carbide on Silicon Carbide
Chassis/Fuel Cell	Steel
Non-Return Valve	Nitrile Fitted Cast Iron

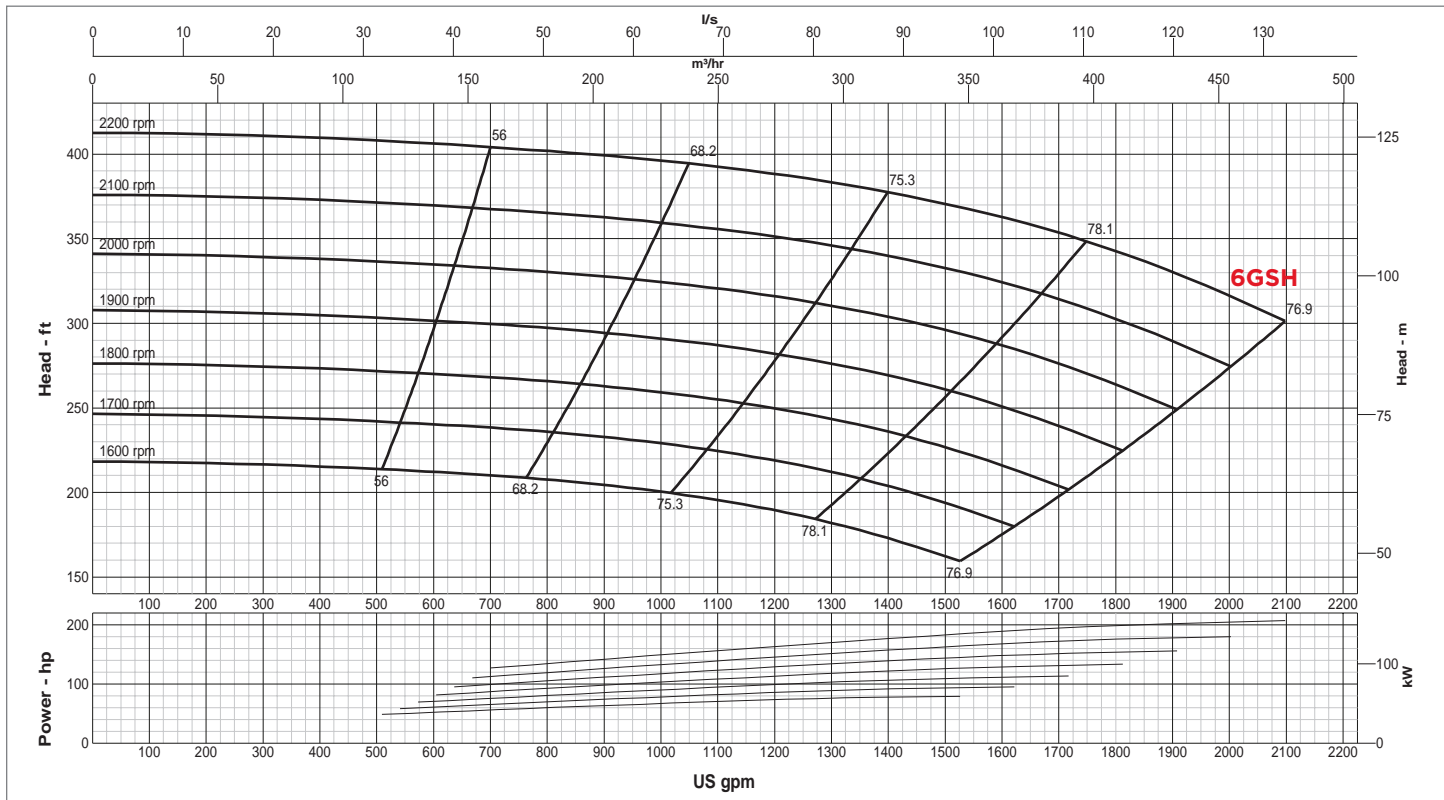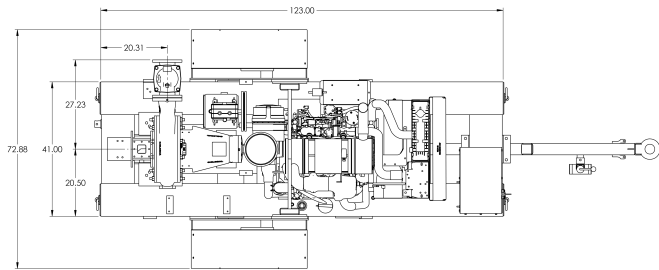

**GLOBAL PUMP**  
 10162 East Coldwater Road, Davison, MI 48423  
 Tel: 810.653.4828 Fax: 810.658.0632  
**1.866.360.PUMP** [www.globalpump.com](http://www.globalpump.com)