

## GP25 SOUND ATTENUATED DIESEL GENERATOR



Standard Colors:  
Red or White

Global Pump generators are specifically designed to provide prime power or temporary power anywhere and anytime utility power is not available.

These compact, mobile, sound attenuated generators provide single- and three-phase power simultaneously for construction, commercial, industrial, emergency, and special event applications.

### FEATURES

Rugged design for portable power applications.

Heavy duty, direct injection Perkins diesel engine provides maximum reliability.

Brushless alternator with Permanent Magnet Generator (PMG) for superior motor starting.

Premium Automatic Voltage Regulator (AVR) with three-phase rms sensing for improved regulation and performance.

Automatic start/stop contacts allow the unit to start upon a signal from a transfer switch during a power failure.

Voltage selector switch allows an easy change to a wide variety of voltages. Fine tune to exact requirements by adjusting the voltage rheostat on the front control panel.

Sound attenuated, weather resistant, electrostatic powder painted, lockable enclosure with center lifting point for safe, unattended, quiet operation.

Simultaneous three-phase and single-phase output.

Cam-Lock connectors to provide a quick connection alternative.

Reduced operating cost with 500 hour service intervals and fuel-efficient diesel engines.

Large internal fuel cell for extended run times between refueling.



Environmentally-friendly skid with 110% fluid containment and forklift pockets.

Easy-to-read digital controller with safety shutdowns for safe, accurate generator and engine monitoring.

Trailer with flush mount DOT lighting, safety chains, adjustable height couple, and electric brakes.

EPA emission compliance to 40 CFR 1039.625.

# GP25 SOUND ATTENUATED DIESEL GENERATOR

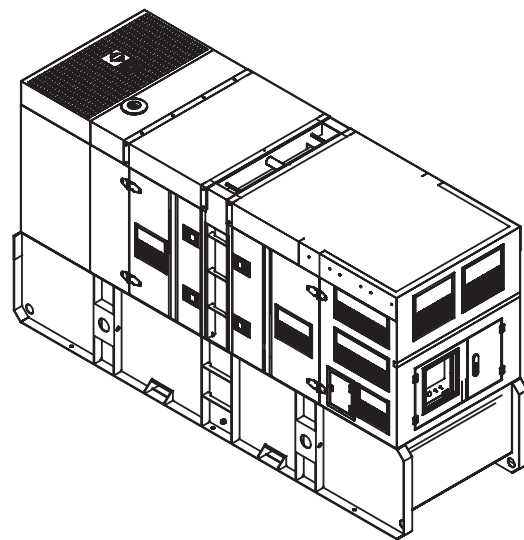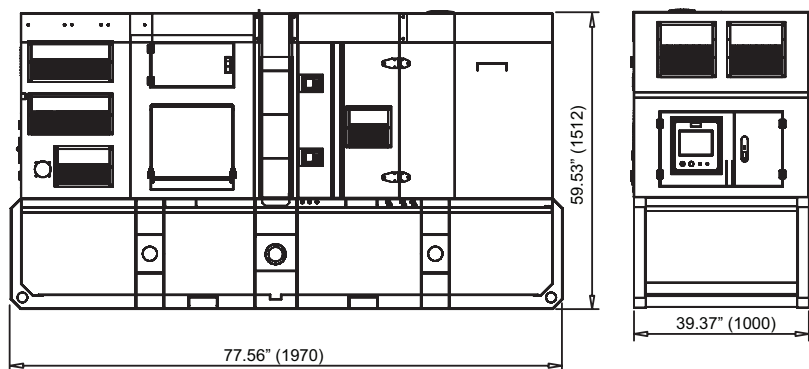

GENERATOR DATA	
Model	GP25-SA4i76
Rated Standby Power @ .8pf	22kW (27 kVA)
Rated Prime Power @ .8pf	20kW (25 kVA)
3Ø Voltage Selections	Switchable 208/120, 220/127, 240/139 480/277, 460/266, 440/254
1Ø Voltage Selections	120/240
Amperage Capacity @ 120V 1Ø	55 Amps X 2 (Zigzag)
Amperage Capacity @ 240V 1Ø	55 Amps (Zigzag)
Amperage Capacity @ 208V 3Ø	69 Amps
Amperage Capacity @ 240V 3Ø	60 Amps
Amperage Capacity @ 480V 3Ø	30 Amps
Connection Terminals and Receptacles	1-Single row mechanical lug, hex head 1-Single row color coded Cam Locks 2- 20A, 120V GFCI, NEMA 5-15R 2- 50A, 250V, CS6369
Sound Level Full Load @ 23'	69 db(A)
Fuel Cell Capacity	50 gallons (190 liters)
Fuel Consumption	gph (lph)
100% load	1.6 (6.2)
75% load	1.2 (4.8)
50% load	0.9 (3.5)
25% load	0.4 (1.6)
Controller	Deepsea 7310
Safety Protection	Water Temp, Oil Pressure Emergency Stop Button kW/kVA/Amp Parameter Monitoring Battery Disconnect Lockable Voltage Selection Generator Output Protection

ENGINE	
Engine Make	Perkins
Engine Model	404D-22
Emissions Compliance	EPA Tier 4i
Design	4 Cylinder, 4-cycle, water cooled, direct injection, turbocharged
Displacement	2.2 liter
Rated Speed	1,800 rpm
Gross Engine Power Output	32 HP (24 kW)
Oil Capacity	2.8 gal (10.6 L)
Battery	12V 100Ah x 1

ALTERNATOR	
Model	Stamford
Excitation	Brushless Self Excited
Automatic Voltage Regulator	Stamford AS480
Frequency	60 Hertz
Voltage Regulation	±1.0%
Frequency Regulation	±.50%
Insulation	Class H
T.I.F.	<50

SKID DIMENSIONS	Inch (mm)
Length	77.56" (1,970 mm)
Width	39.37" (1,000 mm)
Height	59.03" (1,512 mm)
Weight (dry)	2487 lbs (1,128 kg)

TRAILER OPTIONS	
Standard Single Axle	
Electric/Surge Brakes	
DOT Approved Recessed Lighting	



**GLOBAL PUMP**  
 10162 East Coldwater Road, Davison, MI 48423  
 Tel: 810.653.4828 Fax: 810.658.0632  
**1.866.360.PUMP**      [www.globalpump.com](http://www.globalpump.com)